


## CFD2001

20.1" Color-Flat-Display  
for 19" Rack, 9U

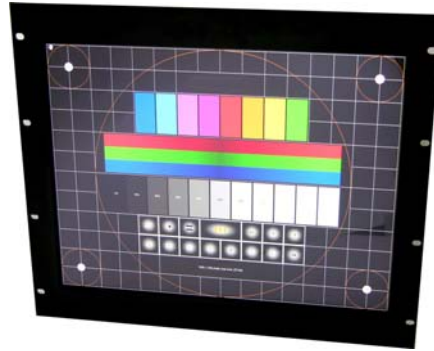

### Display

- Panel: Color TFT-LCD
- Display size: 20.1"
- Active area: 408 x 306 mm (HxV)
- Resolution: 1600 x 1200 pixel (HxV)
- Display color: 16.7M colors (RGB 8bit)
- Pixel pitch: 0.255 x 0.255 mm (HxV)
- Luminance: 250 cd/m<sup>2</sup>
- Contrast ratio: 600 :1
- Viewing angle: 170° (H+V)
- Response time (Tr): 25ms (Tr = Tr<sub>R</sub> + Tr<sub>D</sub>)
- Rise time (Tr<sub>R</sub>): 15ms
- Decay time (Tr<sub>D</sub>): 10ms

### Video Signal

- Signal: VGA analogue  
DVI-D
- V-frequency range: 55 ... 85 Hz
- H-frequency range: 31 ... 80 kHz

### Power Supply

- Supply voltage: 100...240 VAC

### Connectors / Controls

- Video input: D-SUB HD15pin, socket  
DVI-D 24pin, socket
- Mains input: IEC-connector
- OSD Menu: 4 keys

### Dimensions

- Width: 482 mm (19")
- Height: 400 mm (9U)
- Depth: 75 mm

### Weight

- Total: approx. 7 kg

### Environmental

- IP protection: IP65, frontside
- Storage temperature: -20 ... +60 °C
- Operating temperature: 0 ... +50 °C